


FOR USE IN AMBIENT AND GENERAL LIGHTING APPLICATIONS

PROJECT  
TYPE  
PART NUMBER

## FEATURES

- Low profile fixture with a simple and clean aesthetic
- Diverse controls compatibilities provide ease of mind in useability
- Ideal for surface mount general lighting needs
- End to end illumination using a dependable light engine with an L70 of greater than 150,000 hours
- Wide variety of lumen packages available
- Color Tuning and RGBW available with correlating controls packages

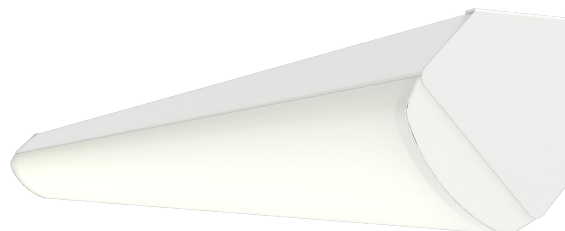

## SPECIFICATIONS

### CONSTRUCTION

- Pre painted white steel utilizing screw fasteners for gear tray connection
- White acrylic endcaps

### MOUNTING & INSTALLATION

- Surface mount
- Connection brackets upon request to be used for end to end applications
- Installation kits available for various ceiling styles

### OPTICAL

- Evenly diffuse extruded acrylic lens
- Wide distribution due to wrap around curved lens

### ELECTRICAL

- LED Light Engine designed for reliability and long life operation
- Standard 0-10V dimming to 1%
- 120 - 277 V standard; 347V or 480V available



### CONTROLS

- Individual or grouping control with many solutions available
- Consult factory for specific requirements

### LISTINGS

- DesignLights Consortium qualified, see DLC QPL
- ETL safety certified for damp locations
- Standard 5 year warranty

## DIMENSIONAL INFORMATION

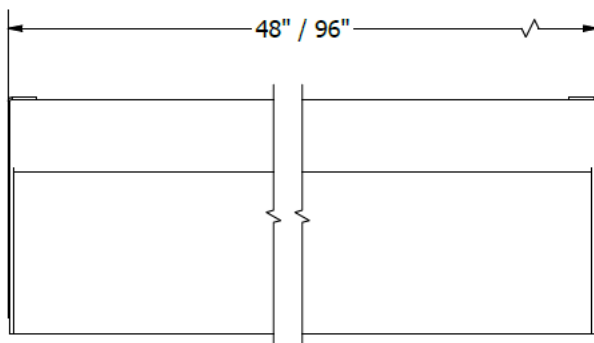


## ORDERING INFORMATION

STYLE	SIZE	LIGHT ENGINE		COLOR TEMP	FR-45	OPTIONS (CONTINUED)
<b>F</b> FIXTURE	<b>14CE</b> 1' x 4'	<b>1' X 4'</b>	<b>1' X 8'</b>	<b>35</b> 3500K	<b>FR</b> FROSTED LENS (STANDARD OPTION)	<b>SD</b> STEP DIMMING (BI LEVEL OR TRI LEVEL)
	<b>18CE</b> 1' x 8'	<b>F4X2S</b> 13W 1819 LUMENS	<b>F4L4S</b> 27W 3638 LUMENS	<b>40</b> 4000K	<b>45</b> CE 45 DEGREE BODY	<b>LVD120 / 277</b> 120V / 277V LINE VOLTAGE DIMMING
	1' X 2' OPTIONS AVAILABLE	<b>F4X8S</b> 18W 2467 LUMENS	<b>F4N6S</b> 36W 4935 LUMENS	<b>50</b> 5000K		<b>D</b> PREWIRED FOR 0-10V DIMMING
		<b>F4L4S</b> 24W 3211 LUMENS	<b>F4M6S</b> 48W 6422 LUMENS	<b>2765*</b> 2700K - 6500K		<b>EM</b> EMERGENCY BACKUP INCLUDED (6W STANDARD)
		<b>F4L9S</b> 29W 3870 LUMENS	<b>F4H8S</b> 58W 7739 LUMENS			<b>CT</b> COLOR TUNING WITH VARIOUS CONTROL OPTIONS AVAILABLE
		<b>F4N2S</b> 32W 4216 LUMENS	<b>F4V4S</b> 64W 8431 LUMENS			<b>CONTROL OPTIONS AVAILABLE</b> CONSULT FACTORY
		<b>F4N5S</b> 35W 4576 LUMENS	<b>F4Y0S</b> 70W 9153 LUMENS			
		<b>F4N9S</b> 39W 5074 LUMENS	<b>F4Y9S</b> 79W 10149 LUMENS			
		<b>F4M4S</b> 44W 5622 LUMENS	<b>F4Z9S</b> 89W 11244 LUMENS			
					<b>CUSTOM OPTIONS</b>	

\* 2765 is only for color select options using a compatible control system

## ADDITIONAL GRAPHICS

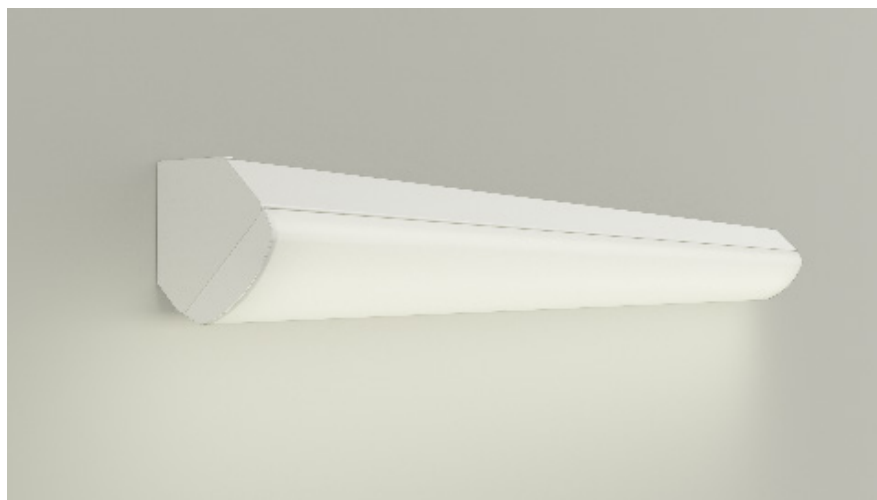

USA DESIGNED • USA MANUFACTURED • USA ASSEMBLED  
ENERGY SOLUTIONS INTERNATIONAL • WEST ST PAUL, MN • WWW.ESILIGHTING.COM • (651) 268 - 6060

